



# Tempest™ Portable Torch Wheel Kit

(sku 94800828)

## Overview

This wheel kit is for the Tempest portable torch (SKU 94900773 and 94900763). It allows the torch to be rolled from one location to another.

**WARNING:** Do not move the torch while it is turned on. Before moving the torch, make sure the propane cylinder is shut off and secure. Make sure the glass panels are secure before moving to prevent the glass from sliding out.


## Packing List

- Wheel Assembly
- (2) 5/16"-18 Bolts
- (2) 5/16"-18 Nuts
- (2) 5/16" Washers

## Installation

1. The wheel kit is attached to the steel base of the torch before the torch is assembled. Two holes are provided on the back of the base for installation (see Figure 1). You may need to remove two plugs to expose these holes.

**NOTE:** Certain torch bases did not include these holes. If the holes are not present, place the wheel assembly in place (see step 2 below), mark the hole locations, and drill two 3/8" diameter holes.

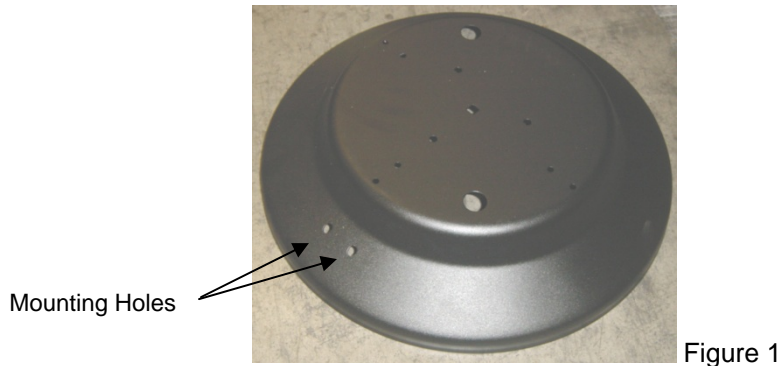

2. The wheel assembly has two holes that fit under the rim of the base (see Figure 2). Slide the hooks under the base and line up the holes on the wheel assembly with the holes on the base.



Figure 2



Figure 3

3. Insert the bolts through the top of the holes and secure with the nuts (the washers are placed between the nuts and base).